



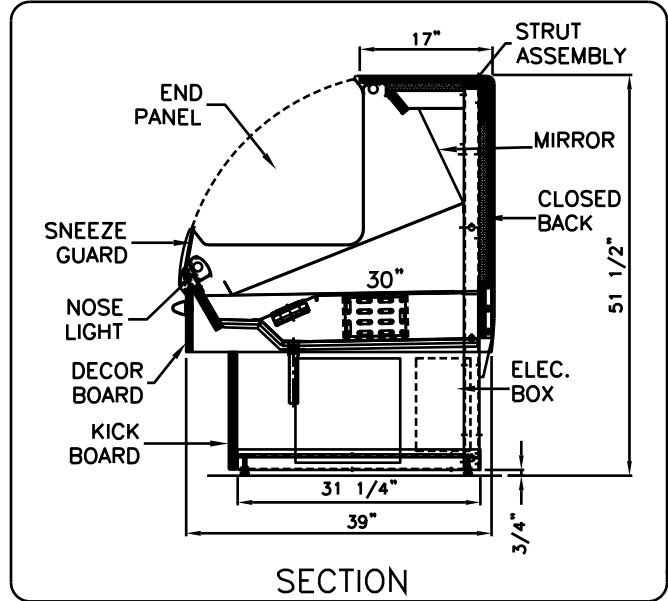

The Ekomax XL Series


RPM-REFRIGERATED PRODUCE MERCHANDISER

ITEM # _____

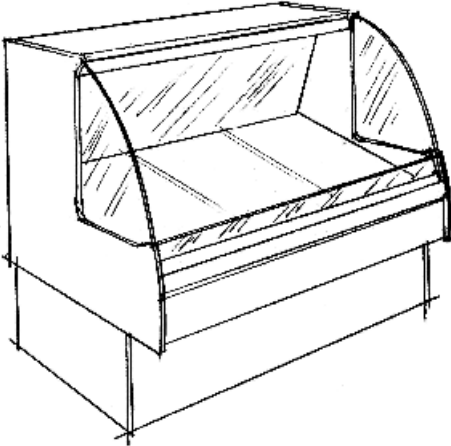

SPECS: Aluminum frame and strut, epoxy painted; leveling legs; anodized aluminum trim; lights w/ spectrum sleeves; 3/4" plywood finish millwork; self-contained (R134a) w/ electric evaporator or remote. (Electrical evap. pan to be wired at 12.5a) Refrigerated cases are engineered to operate in a controlled environment not exceeding 75°F and 55% relative humidity. ETL sanitation listed to NSF 7.

	Standard	Optional
ALUMINUM TRIM		
Chrome Anodized	<input type="checkbox"/>	
Brass Anodized	<input type="checkbox"/>	
Epoxy paint colors		<input type="checkbox"/>
INTERIOR/UPPER STRUCTURE		
Epoxy Paint -White	<input type="checkbox"/>	
Epoxy Paint -Black	<input type="checkbox"/>	
Epoxy Paint - other colors		<input type="checkbox"/>
Stainless Steel (int. only)		<input type="checkbox"/>
END/DIVIDER GLASS		
1/4" Tempered	<input type="checkbox"/>	
1/4" Temp.-Mirror Film		<input type="checkbox"/>
END PANELS/DECOR BD/KICKBD		
Pl.Laminate on Plywood	<input type="checkbox"/>	
Maple,Cherry,Oak Veneer		<input type="checkbox"/>
Stainless Steel		<input type="checkbox"/>
EQUIPMENT		
Energy Saving Night Cover		<input type="checkbox"/>

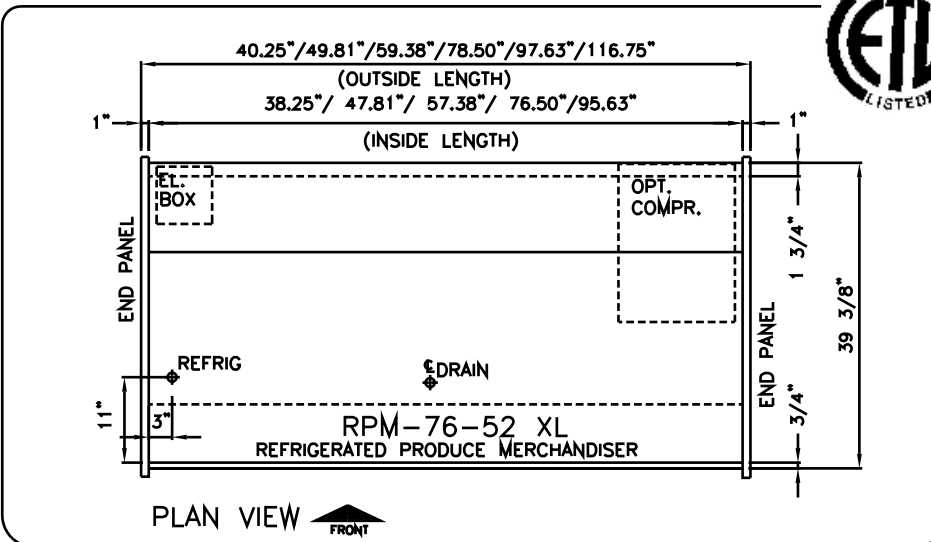

MODEL	LENGTH in mm	VOLTAGE	AMPS REMOTE <input type="checkbox"/>	AMPS SELF-CONT. <input type="checkbox"/>
<input type="checkbox"/> RPM-38-52 XL	38.25" 972	115v/1/60	3.1	13.1
<input type="checkbox"/> RPM-48-52 XL	47.81" 1214	115v/1/60	3.1	15.1
<input type="checkbox"/> RPM-57-52 XL	57.38" 1457	115v/1/60	3.3	15.3
<input type="checkbox"/> RPM-76-52 XL	76.50" 1943	115v/1/60 230v/1/60	6.2	6.7 8.7
<input type="checkbox"/> RPM-96-52 XL	95.63" 2429	115v/1/60 230v/1/60	6.2	6.7 9.6
<input type="checkbox"/> RPM-115-52XL	114.75" 2915	115v/1/60	6.2	N/A

IMPORTANT:
ELECTRIC EVAP. PAN REQUIRES
115/1/60 15 AMP CIRCUIT.