



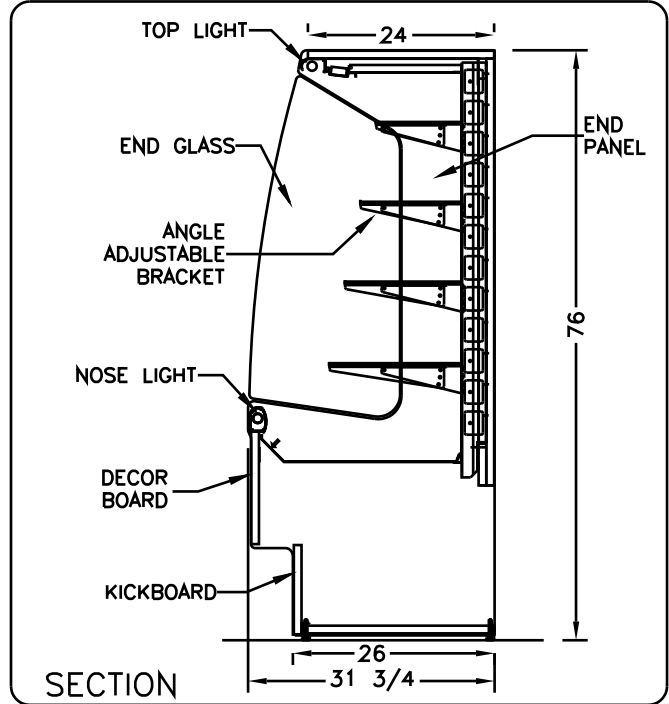


The New Omega Series

RSS-REFRIGERATED SELF SERVE, 76"

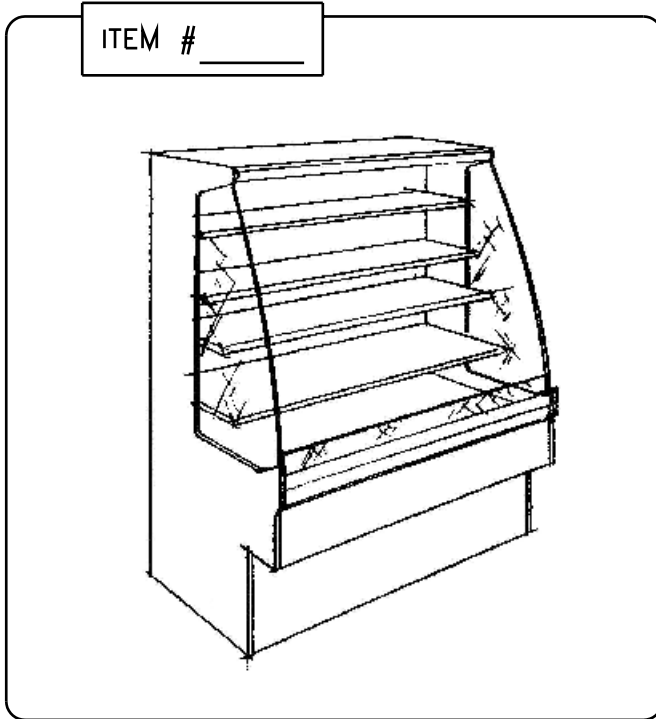

SPECS: Aluminum support frame; leveling legs; series 300 st. steel ref. comp.; Epoxy painted interior; anodized alum. trim; .25 tempered glass shelves; lights w/ spectrum sleeves, 1" ply. finished millwork; self-contained (R134a) w/ electric evaporator pan or remote; ETL sanitation listed to NSF standard 7
 Controlled environment not exceeding 75°F 55% relative humidity

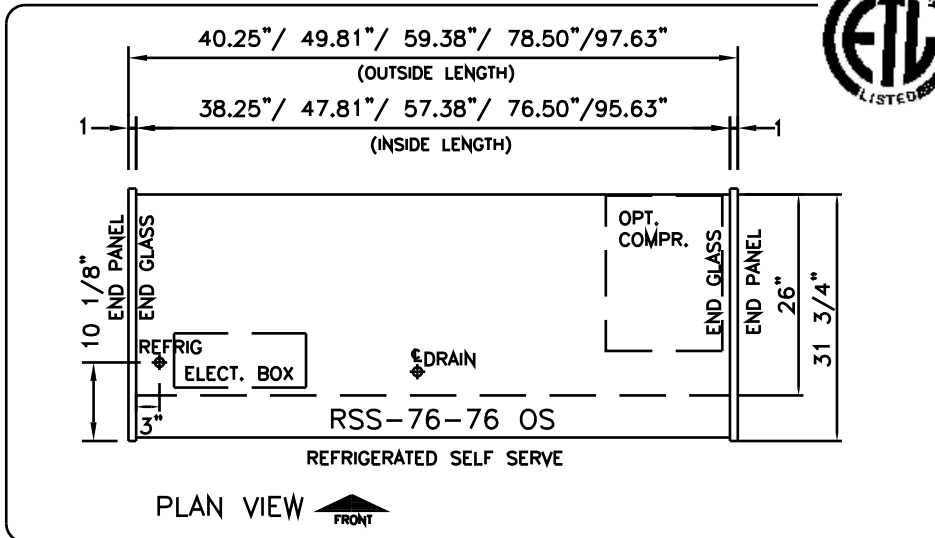

- | INTERIOR FINISHES | Standard | Optional |
|-----------------------------------|--------------------------|--------------------------|
| Point Black | <input type="checkbox"/> | <input type="checkbox"/> |
| Point White | <input type="checkbox"/> | <input type="checkbox"/> |
| Mirrored St. Steel | <input type="checkbox"/> | <input type="checkbox"/> |
| ALUMINUM TRIM | | |
| Chrome Anodized | <input type="checkbox"/> | <input type="checkbox"/> |
| Brass Anodized | <input type="checkbox"/> | <input type="checkbox"/> |
| SHELVES | | |
| 1/4" Tempered Glass | <input type="checkbox"/> | <input type="checkbox"/> |
| Black Wire | <input type="checkbox"/> | <input type="checkbox"/> |
| Stainless Steel | <input type="checkbox"/> | <input type="checkbox"/> |
| Additional Light | <input type="checkbox"/> | <input type="checkbox"/> |
| END/ DIVIDER GLASS | | |
| 1/4" Temp. Glass | <input type="checkbox"/> | <input type="checkbox"/> |
| 1/4" Temp. Glass W/Mirror | <input type="checkbox"/> | <input type="checkbox"/> |
| END PANELS/DECOR BD/KICKBD | | |
| Pl.Laminate on Plywood | <input type="checkbox"/> | <input type="checkbox"/> |
| EQUIPMENT | | |
| Rear Loading Doors | <input type="checkbox"/> | <input type="checkbox"/> |
| Energy Saving Cover | <input type="checkbox"/> | <input type="checkbox"/> |
| Security Cover | <input type="checkbox"/> | <input type="checkbox"/> |

MODEL	LENGTH in mm	VOLTAGE	AMPS SELF-CONT. <input type="checkbox"/>	AMPS REMOTE <input type="checkbox"/>
RSS-38-76 OS	38.25" 972	1 ● 115V/1/60 1 ● 115V/1/60	15.1 7.5	3.1
RSS-48-76 OS	47.81" 1214	1 ● 115V/1/60 1 ● 230V/1/60	13.5 8.7	3.1
RSS-57-76 OS	57.38" 1457	1 ● 115V/1/60 1 ● 230V/1/60	13.5 8.7	3.3
RSS-76-76 OS	76.50" 1943	1 ● 115V/1/60 1 ● 230V/1/60	19.5 9.6	6.2
RSS-96-76 OS	95.63" 2429	1 ● 115V/1/60 1 ● 230V/1/60	19.5 9.6	6.2