



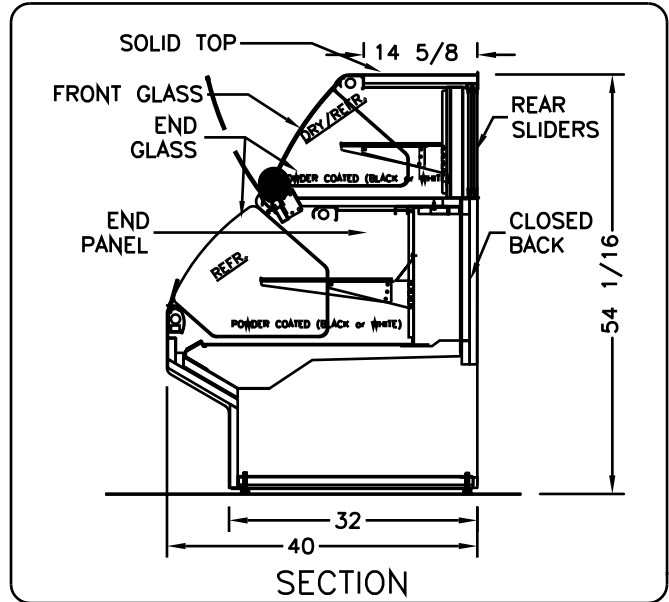


The New Omega Series

SSS-THE DOUBLE DECKER 54"

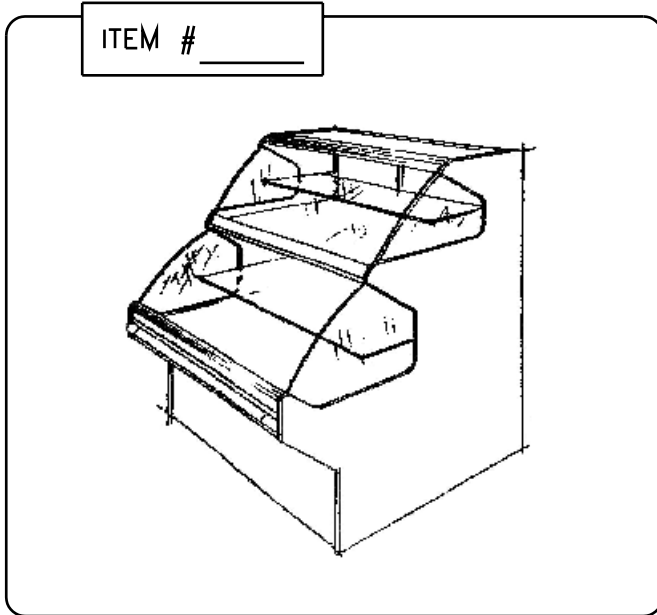

SPECS: Aluminum support frame; leveling legs; Series 300 st. steel ref. comp.; Epoxy painted interior; anodized alum. trim; .25 tempered shelves & front curved glass; tilt-out front glass std.; lights w/ spectrum sleeves, 1" ply finished millwork; self-contained (R134a) w/ electric evaporator pan or remote; ETL sanitation listed to NSF standard 7 Case designed to operate in a controlled environment not exceeding 75°F and 55% relative humidity

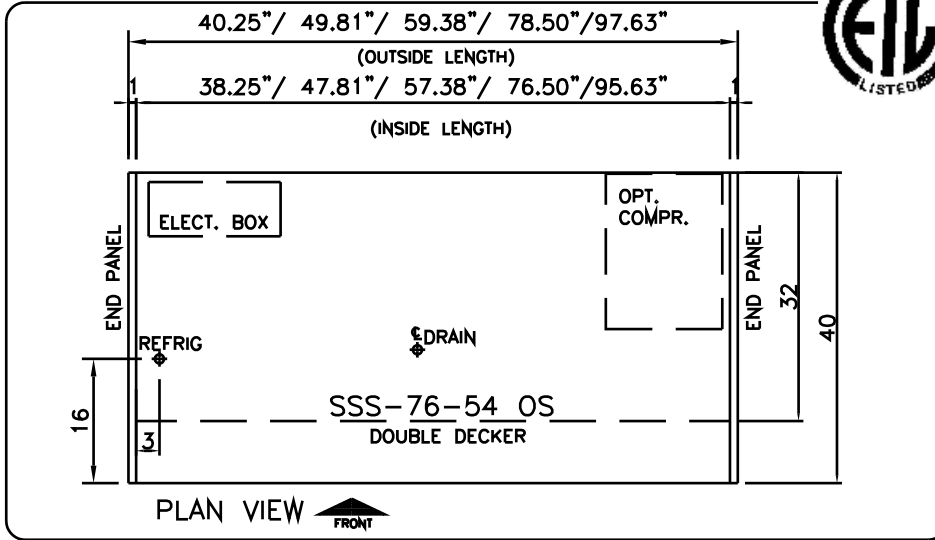

- | | | |
|-----------------------------------|--------------------------|--------------------------|
| EUROPEAN CURVED GLASS | Standard | Optional |
| Tilt-Out Front Glass | <input type="checkbox"/> | <input type="checkbox"/> |
| INTERIOR FINISHES | | |
| Paint Black | <input type="checkbox"/> | <input type="checkbox"/> |
| Paint White | <input type="checkbox"/> | <input type="checkbox"/> |
| Mirrored St. Steel | <input type="checkbox"/> | <input type="checkbox"/> |
| ALUMINUM TRIM | | |
| Chrome Anodized | <input type="checkbox"/> | <input type="checkbox"/> |
| Brass Anodized | <input type="checkbox"/> | <input type="checkbox"/> |
| SHELVES | | |
| 1/4" Tempered Glass | <input type="checkbox"/> | <input type="checkbox"/> |
| Black Wire | <input type="checkbox"/> | <input type="checkbox"/> |
| Stainless Steel | <input type="checkbox"/> | <input type="checkbox"/> |
| Additional Light | <input type="checkbox"/> | <input type="checkbox"/> |
| END/ DIVIDER GLASS | | |
| 1/4" Temp. Glass | <input type="checkbox"/> | <input type="checkbox"/> |
| 1/4" Temp. Glass w/Mirror | <input type="checkbox"/> | <input type="checkbox"/> |
| SLIDING DOORS | | |
| Clear Plexi | <input type="checkbox"/> | <input type="checkbox"/> |
| Plexi w/ Mirror Film | <input type="checkbox"/> | <input type="checkbox"/> |
| END PANELS/DECOR BD/KICKBD | | |
| Pl.Laminate on Plywood | <input type="checkbox"/> | <input type="checkbox"/> |

MODEL	LENGTH in mm	VOLTAGE	AMPS SELF-CONT. <input type="checkbox"/>	AMPS REMOTE <input type="checkbox"/>
SSS-38-54 OS	38.25" 972	1 ● 115V/1/60	15.1	3.1
		1 ● 115V/1/60	7.5	
SSS-48-54 OS	47.81" 1214	1 ● 115V/1/60	15.1	3.1
		1 ● 115V/1/60	7.5	
SSS-57-54 OS	57.38" 1457	1 ● 115V/1/60	16.0	3.3
		1 ● 230V/1/60	8.7	
SSS-76-54 OS	76.50" 1943	1 ● 115V/1/60	16.0	6.2
		1 ● 230V/1/60	9.6	

2: D:\CAT-2005\omega\dwg\24-SSS-54.dwg, 6/10/2005 11:25:03 AM, Jayne Hurley